


SUPER 16 UV OZONE

Technical Details

• Model	Super 16
• Input	220 V
• Ampere	0.25 A
• Frequency	50Hz
• Ozone Output	1000 mg / hr.
• Generation System	UV, 185nm, germicidal
• Air flow (nominal figure)	70m ³ / hr.
• Adjustability	Fixed
• Enclosure	Extruded aluminium
• Powder coated	
• Weight	1, 2 kg

Applications

- Mortuaries
- Ablution Control
- Emissions
- Flood restoration
- Smoking Rooms
- Container
- Decontamination
- Sewage odour
- Hotel rooms
- Change rooms
- Medical Suites

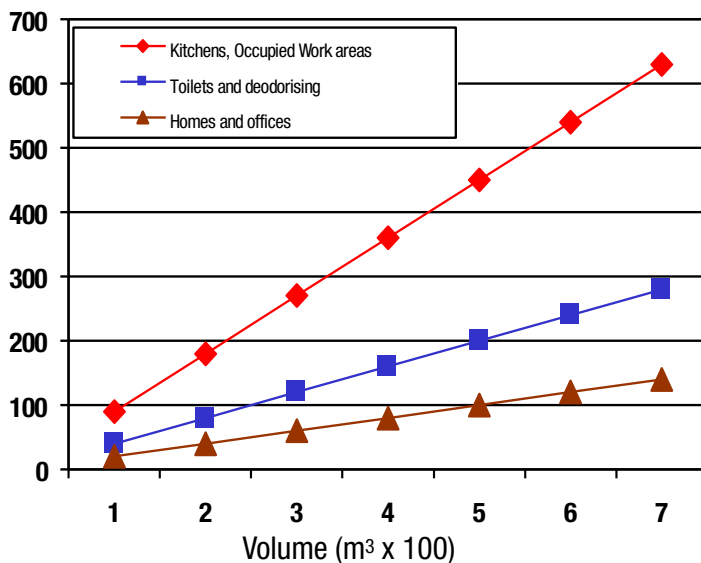

Please note that we reserve the right to alter, amend or change all units without prior notice.

E&OE

PROD CODE 27